

# JAD043R Series DC Fan Cross Flow Fan


## FEATURES

144mm (5.7in) to 416mm (16.4in) lengths. DC Brushless type motor, temperature resistant aluminum alloy, ball or sleeve bearings. **Maximum Pressure: 0.7mmAq (0.027inH2O) to 1.8mmAq (0.070inH2O), Maximum Air Flow: 24CFM (0.7m<sup>3</sup>/min) to 95CFM (2.7m<sup>3</sup>/min).** CE listed.



## DIMENSIONS

(size:mm)

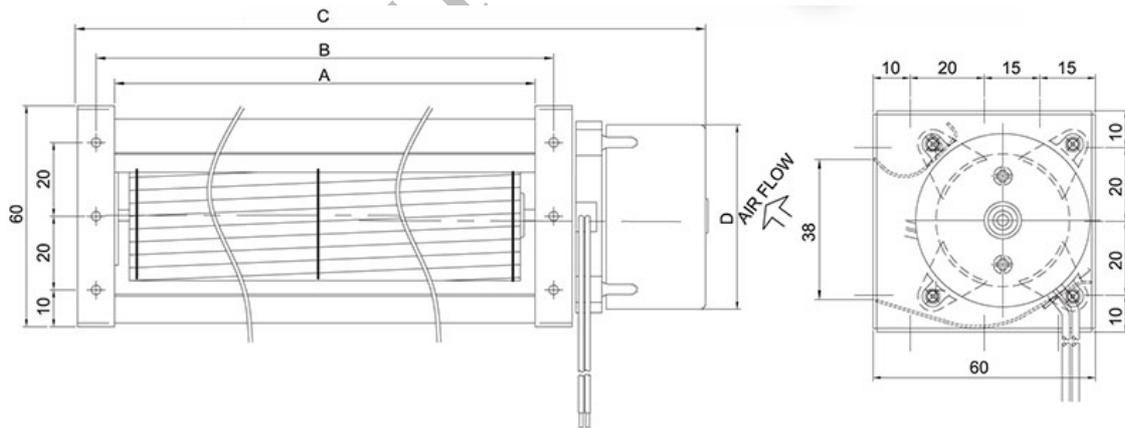

Dimensions and Specifications are subject to change without notice,  
please refer to the actual product.

**SPECIFICATIONS**

| Model \ Spec   | Size(mm) |     |     |    | Rated Voltage<br>V | Rated Current<br>A | Speed<br>r.p.m | Max Pressure<br>mmAq | Maximun Air Flow<br>m³/min | Noise<br>dBA | Weight<br>g | Safety Approval |     |    |
|----------------|----------|-----|-----|----|--------------------|--------------------|----------------|----------------------|----------------------------|--------------|-------------|-----------------|-----|----|
|                | A        | B   | C   | D  |                    |                    |                |                      |                            |              |             | UL              | TUV | CE |
| JAD04309R123B  | 98       | 108 | 144 | 31 | 12                 | 0.22               | 2800           | 1.8                  | 0.7                        | 36           | 220         |                 |     |    |
| JAD04309R243B  |          |     |     |    | 24                 | 0.18               |                |                      |                            |              |             |                 |     |    |
| JAD04315R12R3B | 160      | 170 | 208 | 38 | 12                 | 0.35               | 2500           | 1.2                  | 1.2                        | 37           | 270         |                 |     |    |
| JAD04315A24R3B |          |     |     |    | 24                 | 0.20               |                |                      |                            |              |             |                 |     |    |
| JAD04319R12S3B | 198      | 208 | 246 | 38 | 12                 | 0.35               | 2400           | 1.0                  | 1.5                        | 39           | 310         |                 |     |    |
| JAD04319R24S3B |          |     |     |    | 24                 | 0.20               |                |                      |                            |              |             |                 |     |    |
| JAD04324R12S3B | 250      | 260 | 298 | 38 | 12                 | 0.42               | 2200           | 0.7                  | 1.7                        | 34           | 350         |                 |     |    |
| JAD04324R24R3B |          |     |     |    | 24                 | 0.22               |                |                      |                            |              |             |                 |     |    |
| JA304329R243B  | 300      | 310 | 340 | 38 | 24                 | 0.33               | 2500           | 1.9                  | 2.5                        | 37           | 420         |                 |     | O  |
| JA304335R243B  | 360      | 370 | 400 | 38 |                    | 0.35               | 2400           | 1.6                  | 2.8                        | 37           | 440         |                 |     | O  |

Jia Chuan Technology